

WAVEFORM

# QuadMini Duo

Low-Profile 8x8 MIMO Antenna Kit

## BEFORE YOU START!

Scan this QR code to watch the setup videos, and...

- ▶ Connect to **our team of dedicated Signal Specialists** - They are eager to help!
- ▶ **Get your free Virtual Site Survey** - including a map of cell towers and where to mount your antenna.
- ▶ Access installation **guides for a wide selection of cellular routers!**
- ▶ View a **digital copy** of this manual.



[setup.wf/QuadMiniDuo](http://setup.wf/QuadMiniDuo)


Designed by WAVEFORM in the USA

# What's in the Box

## QuadMini Antennas & Mounting Equipment



2x QuadMini Antennas

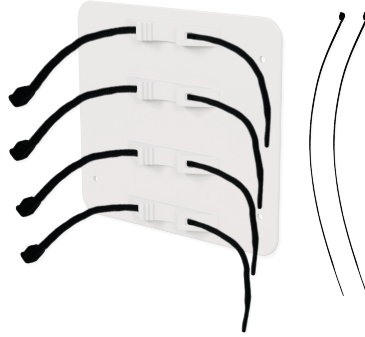

2x Pole Bracket & 12x Zip Ties\*  
(4x Zip ties per for pole-mounted antenna)




2x Desktop Brackets



12x Thumb Screws\*  
(4x per Pole or Desk Bracket)

BAG



12x Screws & Anchors\*  
(4x per wall-mounted antenna)

BAG



8x Suction Cups  
(4x per window-mounted antenna)



10x Velcro Ties  
(for cable management)

BAG

\* Includes extras


## Cables, Adapters, UltraPole

Depending on the QuadMini Duo kit you purchased, you'll also receive some or all of the following:



2x or 4x UltraFlex-Quad Cables  
(Kits include 10 ft and/or 20 ft lengths)

BAG



UltraPole Full Kit

(Includes Base + Extension Kit, manual included in box)

BOX



2x Quad Window Entry Cable  
(Manual included in bag)

BAG



8x U.FL to SMA Pigtail Adapters  
(Adapters included depend on where you purchased)

BAG

\* Includes extras



# 00 Before You Start

Whether it be inside, outside, or on the roof, it's important that there's at least some 4G LTE or 5G signal where you're installing your QuadMini Duo. Ideally, the cell signal should be "usable."

## What Do We Mean by "Usable"?

When using your cellular router or hotspot, **you should be able to complete a data speed test** before connecting your QuadMini Duo. Connect to the Wi-Fi of your cellular device and visit [speedtest.net](https://www.speedtest.net) to run a quick data speed test.




MIMO antennas, like those in QuadMini Duo, will help condition your outdoor signal and get you better data speeds. **But if the signal outside your building isn't usable to begin with, antennas might not help.** You can certainly still give QuadMini Duo a shot, you may not get the results you're expecting.





## Install QuadMini Duo Outdoors If Possible




For the best performance, always **install QuadMini Duo outdoors**. The walls and roof of your house may **limit performance** and impact the speeds you see from your router.





## Compatibility

Your QuadMini Duo supports almost every 4G LTE and low/mid-band 5G service in use in North America, Europe, and across the world. Here are the bands that it covers\*:

USA	 AT&T	B2/n2, B4, B5/n5, B12, B17, B29, B30, B46, B66/n66, n77
	 Verizon	B2/n2, B4, B5/n5, B13, B46, B48/n48, B66/n66, n77
	 T-Mobile	B2, B4, B5, B12, B25, B26, B41/n41, B46, B66, B71/n71, n77

UK	 EE	B1/n1, B3/n3, B7, B20, n28, n78
	 O <sub>2</sub>	B1, B3, B7, B20, n78
	 3	B1/n1, B3/n3, B7, B8, B20, n28, B32, B38, n78
	 Orange	B1, B3, B7, B20, n78

CANADA	 Bell	B2, B4, B5, B7, B12, B13, B17, B29, B46, B66/n66, B71, n78
	 ROGERS	B2, B4, B5, B7, B12, B17, B25, n41, B66/n66, n71, n78
	 TELUS	B2, B4, B5, B7, B12, B13, B17, B25, B26, B29, B46, B66/n66, B71/n71, n78

EUROPE	 O <sub>2</sub>	B1/n1, B3, B7, B8, B20, n28, n78
	 T	B1/n1, B3/n3, B7, B8, B20, B28, B32, n77, n78
	 orange	B1/n1, B3/n3, B7, B8, B20, B28/n28, B32, B38, n78
	 orange	B1, B3, B7, B20, n78

**All supported 4G (LTE) Bands:** B1, B2, B3, B4, B5, B7, B8, B11, B12, B13, B14, B17, B18, B19, B20, B21, B22, B25, B26, B28, B29, B30, B32, B34, B37, B38, B39, B40, B41, B42, B43, B46, B47, B48, B50, B51, B53, B65, B66, B67, B69, B70, B71, B74, B75, B76, B85, B103, B106

**All supported 5G (NR) Bands:** n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n46, n47, n48, n50, n51, n53, n65, n66, n67, n70, n71, n74, n75, n76, n77, n78, n79, n80, n81, n82, n83, n84, n85, n86, n89, n90, n91, n92, n93, n94, n95, n96, n97, n98, n99, n100, n101, n102, n105

*\*The bands your router actually uses may vary from this list. MVNOs and carrier subsidiaries, which use the same bands as those listed for the major carriers listed above are also supported.*

## How Much Improvement Should You Expect?

In short: It's hard to say. **Many people see an increase in data speeds of between 50% and 200%**, but some people may only see 10%. Despite all the science, wireless signals often work in strange and magical ways.

Two things are for sure: **The more spots you try the more likely you are to see a big increase in data speeds.** Also, **you're more likely to find better performance when installing outdoors.**

If you've gone through this manual and position your QuadMini Duo as we suggest, but you're still not seeing much improvement, **please reach out to us for help.**

## What Tools Do You Need?

Your QuadMini Duo includes all of the tools necessary for assembly. If you're wall mounting your antenna, you'll need a **phillips-head screwdriver** and you may need a **drill**.

For the UltraPole, **please refer to the manual included in the package or find the manual online at [waveform.com/ultrapole-manual](http://waveform.com/ultrapole-manual).**

# 01 Install Process Overview

- 1 Read this manual**, ideally from start to finish, so that you understand the whole installation process before you begin.
- 2 Find the best antenna position (Pages 6-9)**. This step takes the most time, but getting it right has a huge impact on your system's performance. Even if you're installing indoors, we recommend a few tests outside. Note your findings in the table provided on page 9.
- 3 Verify performance and connect everything (Pages 10-11)**. Before making any holes in your roof or walls you'll fully connect your system and run speed tests. If everything looks good, you'll finalize the cable runs and hard-wire everything.
- 4 Mount your QuadMini antennas (Page 12-13)**. You'll assemble each QuadMini with one of their mounting options at your choice of antenna position.
- 5 Tell us how your system is doing**. Nothing makes our day like hearing from customers. And if for any reason you're not seeing the results you were hoping for, we can help.

Simply visit [setup.wf/QuadMiniDuo](http://setup.wf/QuadMiniDuo) to **get connected with our team** of dedicated Signal Specialists.

# 02 Finding the Best Antenna Position

While we include indoor mounts for QuadMini Duo, you'll almost always see much better results installing your QuadMini Duo outdoors.

In this section, we'll explain the **simplest and most effective method for identifying the best outdoor location** for your QuadMini Duo. Finding the best antenna position is the most critical step in this whole manual. Section 9 covers advanced tips for additional optimization.

If you can't install your QuadMini Duo outdoors or you're using it in a vehicle, read these steps, along with Section 3, for instructions on how to find their best positions.



## The Goal

Your goal is to find the **best position** for your QuadMini Duo. This position should **maximize the data speeds** from your cellular router. It can take a little patience, but spending some extra time here can have a huge impact on performance - it's worth the extra effort.

## 1. Prepare Your Test Setup

Is your cellular router battery-powered? Or, do you have a power extension cord?

If so, connect both QuadMinis directly to your cellular router (as shown below), and restart your router. Treat the two QuadMinis as a single antenna moving forward.

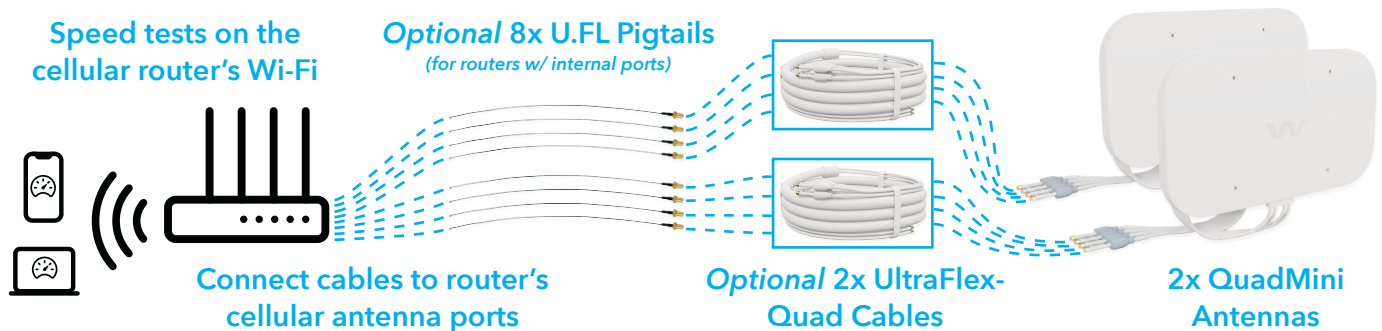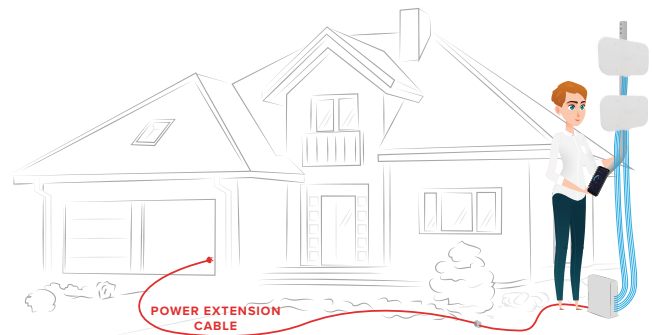

**Can't take your router outdoors?** No problem. Keep your router powered indoors and add the UltraFlex-Quad cable into the setup to bring your QuadMini Duo outside.

If you're leaving your router indoors, your speed tests may be limited by the router's Wi-Fi range rather than its cellular connection. Ask someone to stay near the router so they can run speed tests as you try different positions with QuadMini Duo outside.

## Is holding both QuadMini antennas difficult?

- » *If your kit includes the UltraPole, briefly skip ahead to section 6 of this manual to (partially) assemble your UltraPole and pole-mount your QuadMini Duo.*
- » *If not, have someone assist you with holding both QuadMinis at the same time. If that isn't possible, try to locate a pole or plank to temporarily mount your QuadMini Duo.*

**Not sure which ports to connect to?** Some cellular routers have both Wi-Fi and cellular antenna ports. Make sure to attach both QuadMinis to your router's cellular ports, not Wi-Fi. Some devices only have internal antenna ports. **Refer to your router's manual, our device-specific guides at [waveform.com/hotspot-guides](http://waveform.com/hotspot-guides), or reach out to us for help if you're unsure.**

## 2. Get Ready to Perform Speed Tests

Since the goal is improved data speeds for your cellular router, it makes sense to **judge the best position for your antennas by measuring your data speeds**. We recommend using Speedtest by Ookla for this. Visit [waveform.com/speedtest](http://waveform.com/speedtest) to get there easily.


Once your test setup is ready and your testing phone or laptop is connected to your cellular router, **you'll have everything you need to start testing** at different positions outside.

Go ahead and **run a couple of speed tests to get a baseline**. You'll notice your results fluctuate a between tests - that's completely normal.

## 3. Take Outdoor Measurements

**With each new location, restart your cellular router by disconnecting and reconnecting the power. This forces the device to connect to the best bands available at that location.**

We recommend **running 2-3 speed tests at each of the following outdoor positions** with your QuadMini Duo, and writing each of your results in the table on page 9.

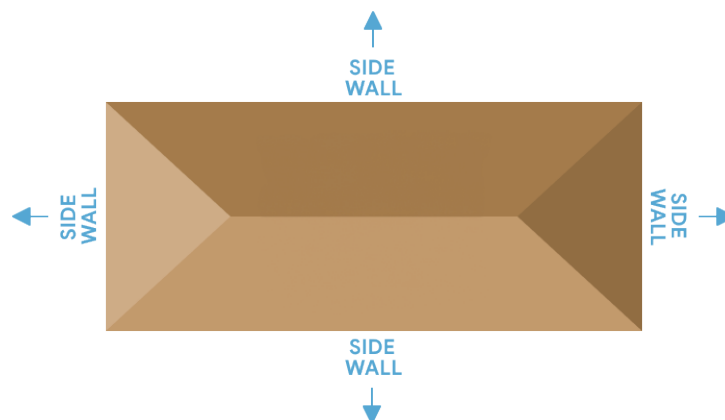


**Don't just go to the highest point of the roof!** While signal is generally stronger the higher you go, there's also often more interference. We've found it's often better to mount QuadMini Duo on the side of the building where they are better shielded from interference.








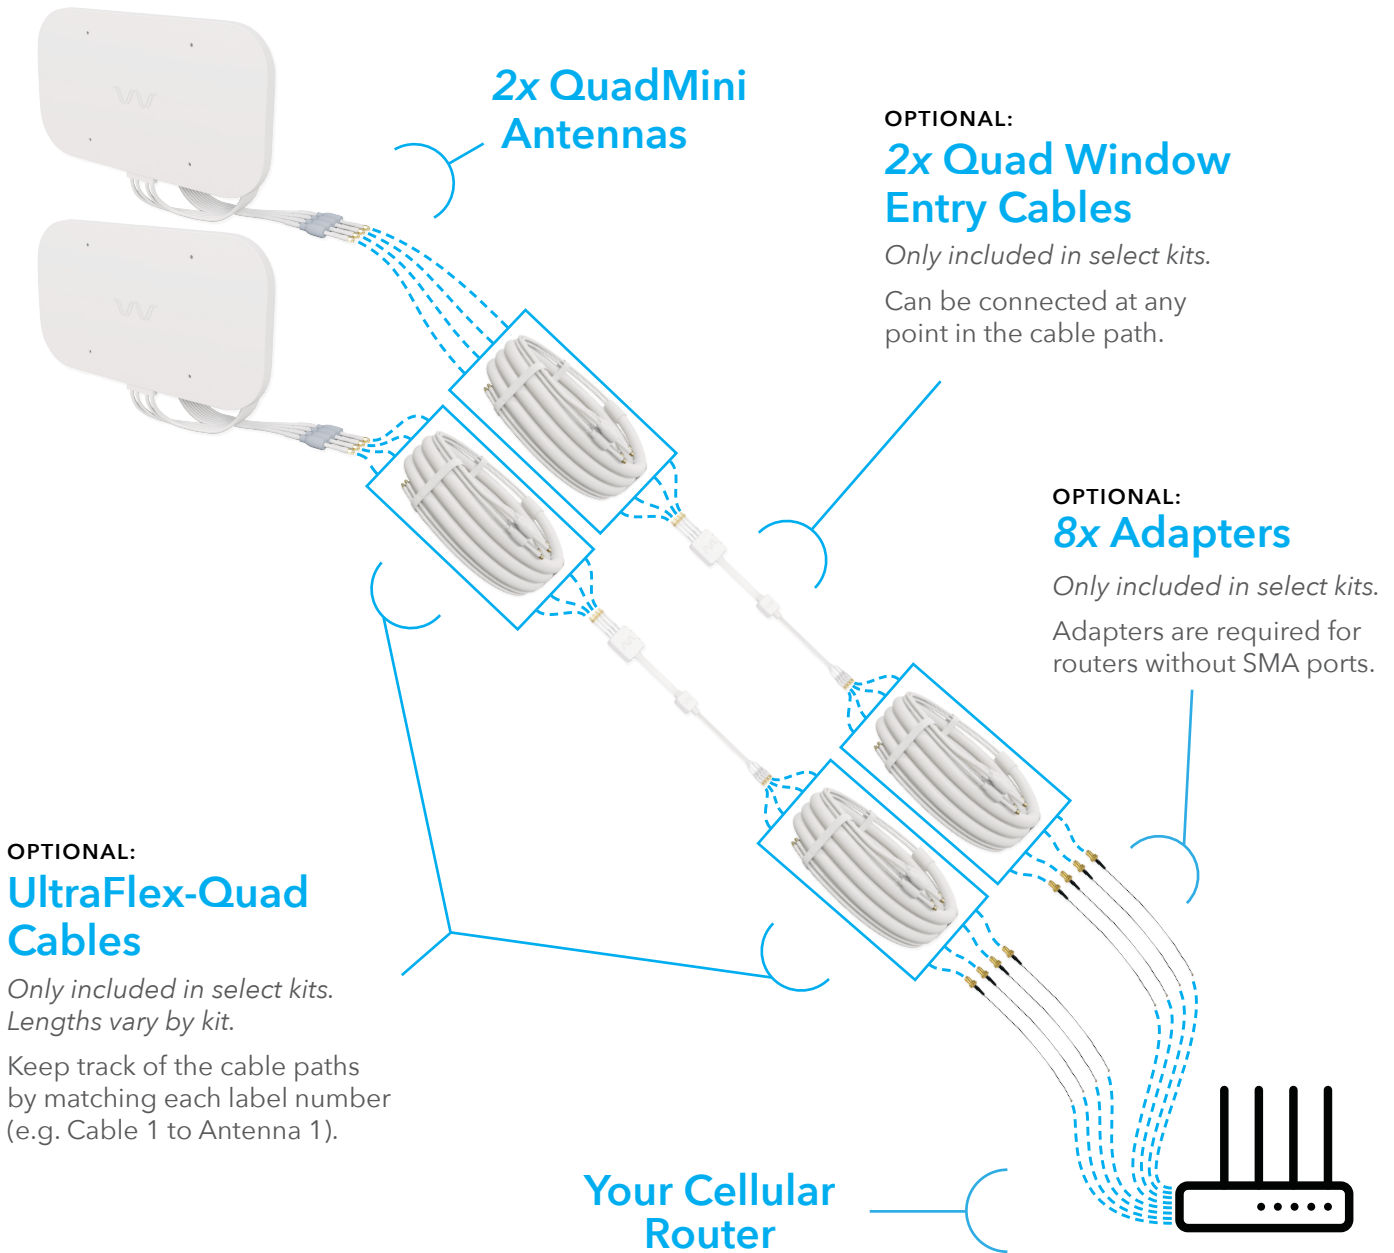


## • How to Install the Quad Window Entry Cable •


Your Quad Window Entry Cable can be connected at any point in your system as needed. Follow the manual included or find it online at [waveform.com/window-entry-manual](http://waveform.com/window-entry-manual). Repeat for each QuadMini.




**1** Loosely position the window entry cable in your window frame, with its larger case outside.



**2** Check that your window fully closes. If not, please reach out to us for assistance.



**3** Connect its indoor connectors to your router or UltraFlex cable.




**4** Connect its outdoor connectors to your QuadMini or UltraFlex cable.

# 06 Mounting Your QuadMini Duo

Now that you have all the components in your system connected and **you've verified that you are happy with your data speeds**, it's time to mount your QuadMini Duo!


## If you're mounting your QuadMini Duo outdoors...

QuadMini Duo offers **two permanent outdoor mounting options**: pole or wall mounting.

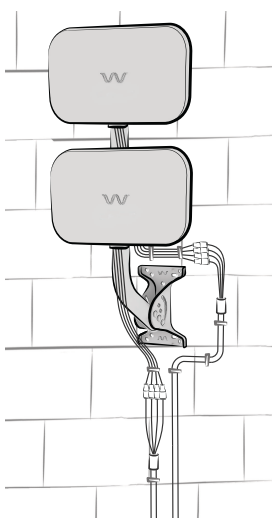


### Option 1: Pole Mount (High Performance)


Follow the steps below to mount each QuadMini against a pole, using the included **pole brackets**:



Place your **pole bracket** into the back of each **QuadMini**.



Secure the **pole bracket** with the **thumb screws**.





Secure each **QuadMini** against your pole by tightening the **zip ties**.


If your kit includes the **UltraPole**, refer to its included manual, or find it online at [waveform.com/ultrapole-manual](http://waveform.com/ultrapole-manual) for its assembly instructions.

### Option 2: Wall Mount


Follow the steps below to mount each QuadMini directly against the side of your building, using the included **screws**. Also, use the **anchors** when installing on hard surfaces like concrete or soft materials like drywall.

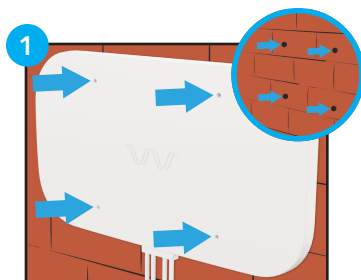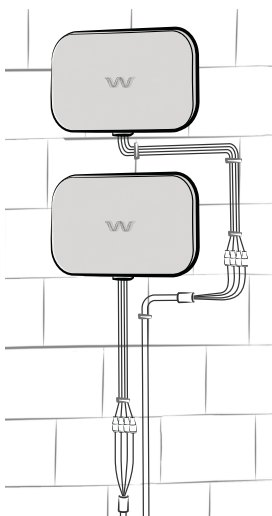

Hold both **QuadMinis** in position and mark each hole. Then, drill pilot holes.



(Optional) Install the **anchors** into the wall of your building.




Place each **QuadMini** against the wall and install the **screws**.

## If you're mounting your QuadMini Duo indoors...


QuadMini Duo also offers **two indoor mounting options**: window or desktop mounting. For better performance, **we strongly recommend mounting** your QuadMini Duo outdoors instead.

Regardless of the mounting option you choose, **remember to mount the antennas near the window you identified in sections 3 & 4.**




### Option 3: Window Mount


If you can't mount your QuadMini Duo outdoors, follow the steps below to mount each QuadMini against your window, using the included **suction cups**:



Thread each **suction cup** into the back of each QuadMini.




Press each **QuadMini** firmly against the window.

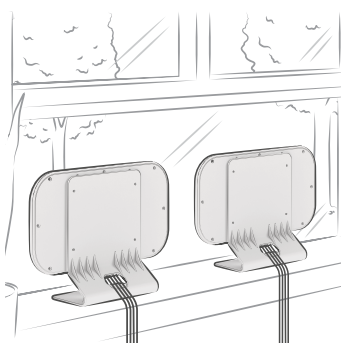


### Option 4: Desktop Mount (Limited Performance)


If you can't mount both QuadMinis directly against your window, but have a nearby windowsill, table, desk, or other flat surface, follow the steps below to position each QuadMini near your window, using the included **desktop mounts**:



(Optional) Feed the cables through the **desktop bracket**.



Align the **desktop bracket** with the back of each QuadMini.



Secure the **desktop bracket** into each QuadMini with the thumb screws.

## We're Here to Help!

We know that every use case is different and the steps for mounting your QuadMini Duo may differ for your unique location. **Don't worry!** If you're running into issues, or have any questions, just reach out.

# 07 Protecting Your Outdoor System

If you're installing QuadMini Duo outdoors, there are a couple of final steps before your installation is complete. However, **if you've installed your antennas inside your building or vehicle**, skip ahead to the next section for advanced optimization tips.

In this section we'll describe how to weatherproof and properly ground your system. **These steps are crucial** to ensuring the longevity of your system by protecting it from the elements.

## Weatherproofing Your Outdoor Connections


Each QuadMini and UltraFlex-Quad cable comes with weatherproofing boots to help waterproof each outdoor cable connection. Once your connectors are tightened, **slide the weatherproofing boots over all of the outdoor cable connections**. Sliding these boots takes a bit of strength so don't be scared to put some elbow-grease into it!



## Grounding Your Mounting Pole

If you've mounted QuadMini Duo against a pole, **it's important to ground your pole** to a suitable electrical ground. Mounting poles can be prime targets for lightning strikes and grounding them with a **10 AWG or lower gauge (thicker) grounding cable** (not included) is required by the National Electric Code (NEC).

**Follow the instructions within the manuals** included with your UltraPole to properly ground it for your system. The general steps are described below:

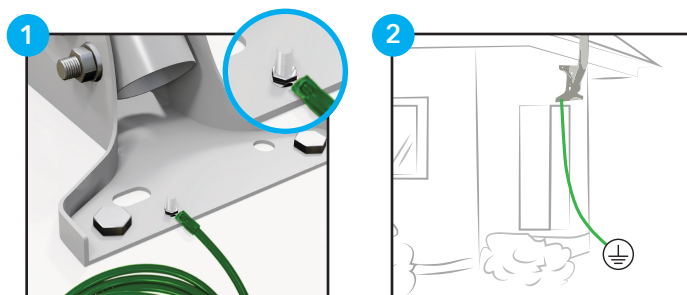

Attach a **ground wire** to your **pole**. e.g. Some mounting poles use a **grounding bolt & nut**.

Attach the **ground wire** to a suitable **electrical ground**.

### Grounding Tips

- If you're unsure about your grounding setup, **reach out to an electrical contractor**.
- **Expanded instructions** on grounding and **examples of suitable electrical grounds** can be found at [waveform.com/grounding](https://www.waveform.com/grounding)

# 08 Advanced Optimization

---

By this point, you should have a really solid understanding of where to position your QuadMini Duo and get great performance. In fact, **we're convinced that for 95% of people, the instructions provided in this manual so far are more than enough.**

If, however, you'd like to go a little deeper and get technical to optimize your system even further, here are some general guidelines.

- 1 Look up your nearby towers** on [cellmapper.net](https://cellmapper.net) by performing a "Tower search" with the "eNB-ID" that your cellular router is connecting to. An eNB-ID is a unique cell tower identifier that can often be found in your cellular router's admin interface.
- 2 If your cellular router supports bandlocking**, band lock it to every band that each nearby tower transmits, and run speed tests for each tower on each band, to find your fastest band(s) and tower.
- 3 Try enabling multiple bands** and using carrier aggregation to find the fastest band combination. Carrier aggregation is supported by most cellular routers and allows them to connect to two or more bands simultaneously. However, it doesn't always result in faster data speeds so stick to a single band if that gets you the best results.

Unfortunately, **many cellular routers don't support band locking or carrier aggregation**, and some don't list eNB-IDs or any other tower identifiers, making these steps difficult. Every cellular router is so different that we could never cover them all with just one set of instructions.

However, **we've written up guides for some of the most common devices**, you can find them online at [waveform.com/hotspot-guides](https://waveform.com/hotspot-guides). We suggest reading our guide for your router, or referring to your user manual.

## We're Here to Help!

We know, there's a lot of information out there and this can get quite technical. If you're running into issues, aren't happy with the performance of your system, or you'd just like a hand, we'd love to help!

Simply visit [setup.wf/QuadMiniDuo](https://setup.wf/QuadMiniDuo) to **get connected with our team** of dedicated Signal Specialists.



# 12 Tell Us How It Works

---

Did your installation go well? Are you having trouble positioning your QuadMini Duo? Do you think our manual could be improved? Are your data speeds not quite what you were hoping?

**Please tell us:** Visit [setup.wf/QuadMiniDuo](https://setup.wf/QuadMiniDuo) to **get connected with our team** of dedicated Signal Specialists. We can't wait to hear from you!

**We're a small team** who loves hearing how our products perform and helping folks get the absolute best data speeds. **So please, reach out!**

## Three ways to get money back!

### Get \$30/£20/€25 by sending us a video of your install:

We'd love to feature your success! Send a 30+ sec video to [videos@waveform.com](mailto:videos@waveform.com) showing **your installed kit** and **speed test results from before and after** your install. *If your antenna is already installed*, briefly switch your router to its original setup to get your "before" results. Once we review your video, we'll PayPal you those funds!

### Earn 5% cash back for each friend you refer:

Love your kit? Refer a friend! They'll get 5% off their kit, and you'll earn 5% (via PayPal) when they purchase directly from [waveform.com](https://waveform.com). Visit [waveform.com/referrals](https://waveform.com/referrals) to get started.

### Get up to \$1000 for each U.S. business you refer:

Know a business in the U.S. with poor cellular signal? Send them our way! If they deploy one of our cellular coverage solutions, you can earn via PayPal:

- **\$250** for spaces between 20,000 and 100,000 sq. ft.
- **\$1,000** for spaces over 100,000 sq. ft.

To get started, simply send an email introduction with your referral to [coverage@waveform.com](mailto:coverage@waveform.com), and we'll handle the rest.







# WAVEFORM

## Need help? We're ready and waiting.

MIMO Antennas, like those in QuadMini Duo, aren't always easy to install. But the end result is worth it.

One of the benefits of buying from Waveform is our **lifetime technical support** on every system we sell. We can walk you through troubleshooting and fine-tuning your installation for best results.

Simply **scan this QR code** to visit [setup.wf/QuadMiniDuo](https://setup.wf/QuadMiniDuo) to **connect with our team** of dedicated Signal Specialists, get your **free Virtual Site Survey**, access **installation guides**, watch our **setup videos**, and more!



We love helping solve tricky install problems.



v2.0.0



Designed by Waveform in the USA



3411 W. Lake Center Dr.,  
Santa Ana, CA 92704



[setup.wf/QuadMiniDuo](https://setup.wf/QuadMiniDuo)



[www.waveform.com](https://www.waveform.com)